



IM-i 3500

6S Features:

Stable—Pure sine wave with THD <3%
Sophisticated—Precision apparatus suitable
Smart—Output adjusted to loading
Saving—Fuel consumption reduced by 15%-30%
Silent—Enjoy electric power quietly
Small—Portable and freight cost saving



Optional:

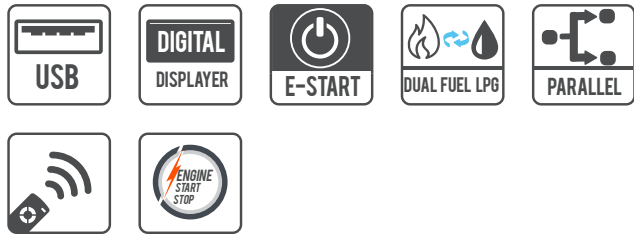

3200W			
Model No.		IM-i 3500	
Generator 发电机	Rated Power	额定功率	3200W
	Max Power	最大功率	3800W
	Rated Voltage	额定电压	230V
	Rated Frequency	额定频率	50Hz
	Rated Current	额定电流	12.2A
	THD	波形畸变率	≤ 3%
	Noise Level	噪音等级	71db @7m
	75% Loading Continuous Operating Time	75%负载连续工作时间	4.5h
Engine 发动机	Engine Model	动力型号	KM165F
	Engine Type	动力类型	OHV, Single Cylinder, Air-cool, 4-stroke 顶置式、单缸、强制风冷、四冲程
	Displacement	排量	149cc
	Engine Output	动力输出	6.5hp
	Engine Start	启动方式	Recoil/Electric
	Fuel Tank Capacity	油箱容量	4.3L
	Oil Capacity	机油容量	0.35L
Package 包装资料	Carton Size	包装尺寸(cm)	53.5*36.5*52.5
	Net / Gross Weight	净重/毛重	23/25kg
	Container load	20GP/40HQ	280/700



IM-Ai 7500SW
IM-i 7500SW

6S Features:

Stable—Pure sine wave with THD <3%
Sophisticated—Precision apparatus suitable
Smart—Output adjusted to loading
Saving—Fuel consumption reduced by 15%-30%
Silent—Enjoy electric power quietly
Small—Portable and freight cost saving



Optional:

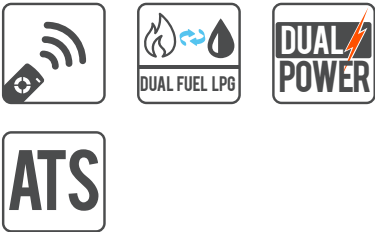

6000W			
Model No.		IM-Ai 7500SW/IM-i 7500SW	
Generator 发电机	Rated Power	额定功率	6000W
	Max Power	最大功率	6500W
	Rated Voltage	额定电压	230V
	Rated Frequency	额定频率	50Hz
	Rated Current	额定电流	21.7A
	THD	波形畸变率	≤ 3%
	Noise Level	噪音等级	78db @7m
	75% Loading Continuous Operating Time	75%负载连续工作时间	5.1h
Engine 发动机	Engine Model	动力型号	KM172Fi
	Engine Type	动力类型	OHV, Single Cylinder, Air-cool, 4-stroke 顶置式、单缸、强制风冷、四冲程
	Displacement	排量	236cc
	Engine Output	动力输出	9.0 hp
	Engine Start	启动方式	Recoil / Electric
	Fuel Tank Capacity	油箱容量	10L
	Oil Capacity	机油容量	0.6L
Package 包装资料	Carton Size	包装尺寸	62.5*48.5*57cm
	Net / Gross Weight	净重/毛重	45/47kg
	Container load	20GP/40HQ	168/344

SILENT INVERTER GENERATOR

6S Features:

- Stable—Pure sine wave with THD <3%
- Sophisticated—Precision apparatus suitable
- Smart—Output adjusted to loading
- Saving—Fuel consumption reduced by 15%-30%
- Silent—Enjoy electric power quietly
- Small—Portable and freight cost saving

DC 12V SOCKET

16A 2X16A SOCKETS

USB

DIGITAL DISPLAYER

E-START

ENGINE START STOP


Optional:

Bluetooth

TRI-FUEL

DUAL POWER

ATS



IM-Ai 14000iSW

9500W			
Model No.		IM-Ai 14000iSW	
Generator 发电机	Rated Power	额定功率	9500W
	Max Power	最大功率	10000W
	Rated Voltage	额定电压	230V
	Rated Frequency	额定频率	50Hz
	Rated Current	额定电流	43.5A
	THD	波形畸变率	≤ 3%
	Noise Level	噪音等级	72db @7m
	75% Loading Continuous Operating Time	75%负载连续工作时间	8h
Engine 发动机	Engine Model	动力型号	KM194FD
	Engine Type	动力类型	OHV, Single Cylinder, Air-cool, 4-stroke 顶置式、单缸、强制风冷、四冲程
	Displacement	排量	485cc
	Engine Output	动力输出	20hp
	Engine Start	启动方式	Recoil / Electric
	Fuel Tank Capacity	油箱容量	32L
	Oil Capacity	机油容量	1.1L
Package 包装资料	Carton Size	包装尺寸	91*68*81.5cm
	Net / Gross Weight	净重/毛重	125/130kg
	Container load	20GP/40HQ	40/138



IM-io 15800SW



Optional:



9500W			
Model No.		IM-io 15800SW	
Generator 发电机	Rated Power	额定功率	9500W
	Max Power	最大功率	10500W
	Rated Voltage	额定电压	230V
	Rated Frequency	额定频率	50/60Hz
	Rated Current	额定电流	39.1A
	THD	波形畸变率	≤ 3%
	75% Loading Continuous Operating Time	75%负载连续工作时间	8h
	75% Loading Continuous Operating Time	75%负载连续工作时间	8h
Engine 发动机	Engine Model	动力型号	KM194F
	Engine Type	动力类型	OHV, Single Cylinder, Air-cool, 4stroke 顶置式、单缸、强制风冷、四冲程
	Displacement	排量	485cc
	Engine Output	动力输出	20.0hp
	Engine Start	启动方式	Recoil / Electric
	Fuel Tank Capacity	油箱容量	28L
	Oil Capacity	机油容量	1.1L
Package 包装资料	Carton Size	包装尺寸	73.5*53.8*64.3cm
	Net / Gross Weight	净重/毛重	74/77kg
	Container load	20GP/40HQ	96/260



IM-io 7500SW

IM-io 12500SW



Optional:



6000W			
Model No.		IM-io 7500SW	IM-io 12500SW
Generator 发电机	Rated Power	额定功率	6000W
	Max Power	最大功率	6500W
	Rated Voltage	额定电压	230V
	Rated Frequency	额定频率	50/60Hz
	Rated Current	额定电流	21.7A
	THD	波形畸变率	≤ 3%
	75% Loading Continuous Operating Time	75%负载连续工作时间	3.6h/7.7h
	75% Loading Continuous Operating Time	75%负载连续工作时间	7.4h
Engine 发动机	Engine Model	动力型号	KM172Fi
	Engine Type	动力类型	OHV, Single Cylinder, Air-cool, 4stroke 顶置式、单缸、强制风冷、四冲程
	Displacement	排量	236cc
	Engine Output	动力输出	9.0hp
	Engine Start	启动方式	Recoil/Electric
	Fuel Tank Capacity	油箱容量	7/15L
	Oil Capacity	机油容量	0.6L
Package 包装资料	Carton Size	包装尺寸	45.5*40*49
	Net / Gross Weight	净重/毛重	26/28kg
	Net / Gross Weight	净重/毛重	29/31kg
	Container load	20GP/40HQ	280/725
			228/590

IM-2500
IM-4000
IM-4000 FSW




Features:

Powerful—Strong output
Prolonged—Long operating and life
Protective—Overload protection
Portable—Wheels and handles equipped



Optional:



			2200W	3200W
Model No.			IM-2500	IM-4000/IM-4000 FSW
Generator 发电机	Rated Power	额定功率	2200W	3200W
	Max Power	最大功率	2800W	3800W
	Rated Voltage	额定电压	230/(120/240)V	230/(120/240)V
	Rated Frequency	额定频率	50/60Hz	50/60Hz
	Rated Current	额定电流	8.7A	12.2A
	75% Loading Continuous Operating Time	75%负载连续工作时间	11.5h	10.4h
Engine 发动机	Engine Model	动力型号	KM170F	KM170F
	Engine Type	动力类型	OHV, Single Cylinder, Air-cool, 4stroke 顶置式、单缸、强制风冷、四冲程	
	Displacement	排量	212cc	212cc
	Engine Output	动力输出	7.0hp	7.0hp
	Engine Start	启动方式	Recoil / Electric	Recoil / Electric
	Fuel Tank Capacity	油箱容量	15L	15L
	Oil Capacity	机油容量	0.6L	0.6L
Package 包装资料	Carton Size	包装尺寸	60.5*47.5*49cm	60.5*47.5*49cm
	Net / Gross Weight	净重/毛重	39/41kg	43/45kg
	Container load	20GP/40HQ	180/455	180/455

IM-6500 FSW IM-13000 FSW
IM-9500 FSW IM-13000A-FSW
IM-9500A-FSW




Features:

Powerful—Strong output
Prolonged—Long operating and life
Protective—Overload protection
Portable—Wheels and handles equipped



Optional:



			6000W	8000W	9500W
Model No.			IM-6500 FSW	IM-9500/9500A FSW	IM-13000/13000A FSW
Generator 发电机	Rated Power	额定功率	6000W	8000W	9500W
	Max Power	最大功率	6500W	8500W	10500W
	Rated Voltage	额定电压	230/(120/240)V	230/(120/240)V	230/(120/240)V
	Rated Frequency	额定频率	50/60Hz	50/60Hz	50/60Hz
	Rated Current	额定电流	21.7A	30.4A	39.1A
	75% Loading Continuous Operating Time	75%负载连续工作时间	11.2h	9h	7.6h
Engine 发动机	Engine Model	动力型号	KM190F	KM192FP	KM194F
	Engine Type	动力类型	OHV, Single Cylinder, Air-cool, 4stroke 顶置式、单缸、强制风冷、四冲程		
	Displacement	排量	420cc	460cc	485cc
	Engine Output	动力输出	15.0hp	18.0hp	20.0hp
	Engine Start	启动方式	Recoil / Electric	Recoil / Electric	Recoil / Electric
	Fuel Tank Capacity	油箱容量	26L	26L	26L
	Oil Capacity	机油容量	1.1L	1.1L	1.1L
Package 包装资料	Carton Size	包装尺寸	70.5*54.5*57.5cm	70.5*54.5*57.5cm	70.5*54.5*57.5cm
	Net / Gross Weight	净重/毛重	82/85kg	87/90kg	92/95kg
	Container load	20GP/40HQ	136/280	136/280	136/280